


# OU5010



## Diffuse reflection sensor

OUT-HPKG

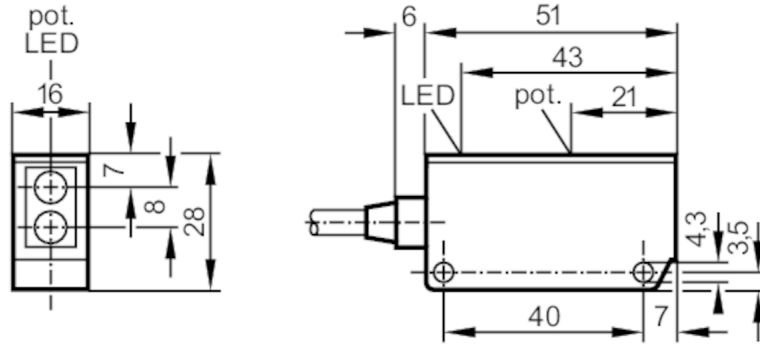

Receiver in upper lens  
transmitter in lower lens



### Product characteristics

Type of light	Infrared light
Housing	rectangular

### Application

Function principle	Diffuse reflection sensor
--------------------	---------------------------

### Electrical data

Operating voltage	[V]	10...55 DC
Current consumption	[mA]	35; ((24 V))
Protection class		II
Reverse polarity protection		yes
Type of light		Infrared light
Wave length	[nm]	880

### Outputs

Electrical design		PNP
Output function		light-on mode
Max. voltage drop switching output DC	[V]	2.5
Permanent current rating of switching output DC	[mA]	250
Switching frequency DC	[Hz]	160
Short-circuit protection		yes
Type of short-circuit protection		yes (non-latching)
Overload protection		yes

### Monitoring range

Range	[mm]	1...200; (white paper 200 x 200 mm)
Range adjustable		yes
Max. light spot diameter	[mm]	180
Light spot dimensions refer to		at maximum range


# OU5010



## Diffuse reflection sensor

OUT-HPKG

Operating conditions		
Ambient temperature	[°C]	-25...80
Protection		IP 67
Tests / approvals		
EMC		EN 60947-5-2
MTTF	[years]	685
Mechanical data		
Weight	[g]	150
Housing		rectangular
Dimensions	[mm]	28 x 16 x 51
Material		PPO modified
Lens material		glass
Lens alignment		Side sensing
Displays / operating elements		
Display	Switching status	1 x LED, yellow
Accessories		
Items supplied		Angle bracket: 1, E20211
Remarks		
Pack quantity		1 pcs.
Electrical connection		
Cable: 2 m, PVC; 3 x 0.34 mm <sup>2</sup>		
Connection		

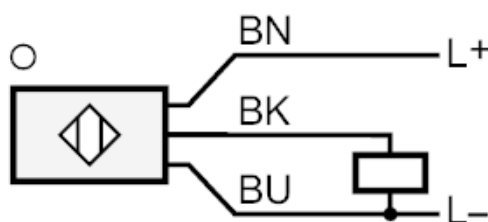

BN	brown
BU	blue
BK	black



## Diffuse reflection sensor

OUT-HPKG

### Diagrams and graphs

excess gain graph

