

AS-i compact module K45 digital A/B slave, 4 DI, IP67 4 x input, maximum 200 mA
4 x M12 socket Mounting plate 3RK1901-2EA00 or 3RK1901-2DA00 is to be ordered separately

General technical data	
design of the product	digital I/O modules for operation in the field, IP67 - K45
Type	4 inputs
design of the slave type	A/B slave
I/O configuration	0
ID/ID2 code	A/0
Number I/O sockets	4
type of electrical connection of the inputs and outputs	M12 screw-type terminals
AS interface total current input max	270 mA
operating voltage according to AS-Interface specification	26.5 ... 31.6 V
Ground terminal	Using PIN5 on the M12 sockets. Outgoing via flat tab sleeve (2.8 x 0.8 mm form A)
Addressing	front addressing socket
AS interface Connection Polarity reversal protection	built-in
Delivery note	the modules are delivered without mounting plate
Sensor supply	
type of voltage supply for power supply	using AS-Interface
input voltage	20 ... 30 V
property of the sensor supply short-circuit and overload resistant	Yes
ampacity of the sensor supply for all inputs	
• at ambient temperature 40 °C	200 mA
Inputs	
number of digital inputs	4
type of connection technology	2- and 3-wire technology
Input circuit	PNP transistor
type of voltage of the input voltages	DC
Inputs switching level High min	10 V
input current at digital input	
• for signal <1> minimum	6 mA
• with signal <0> maximum	1.5 mA
Inputs sensor supply using AS-Interface	short-circuit and overload resistant
Inputs socket assignment	
• PIN 1	sensor supply L+
• PIN 2	data input
• PIN 3	sensor supply L-
• PIN 4	data input
• PIN 5	ground terminal
design of the pin assignment of the inputs	standard assignment
Outputs	
number of digital outputs	0

Display

Status display	
<ul style="list-style-type: none"> display of I/Os 	yellow LED
<ul style="list-style-type: none"> display of Uaux 	not required
<ul style="list-style-type: none"> display of AS-Interface/diagnostics 	green/red dual LED

Assignment of the data bits

Assignment of data bits	
<ul style="list-style-type: none"> socket 	PIN 4/2 = IN1 (D0)
<ul style="list-style-type: none"> socket 2 	PIN 4/2 = IN2 (D1)
<ul style="list-style-type: none"> socket 3 	PIN 4/2 = IN3 (D2)
<ul style="list-style-type: none"> socket 4 	PIN 4/2 = IN4 (D3)

Ambient conditions

ambient temperature	
<ul style="list-style-type: none"> during operation 	-25 ... +85 °C
<ul style="list-style-type: none"> during storage 	-40 ... +85 °C
protection class IP	IP67

Mechanical data

width	45 mm
height	80 mm
depth	30 mm
fastening method	standard rail mounting/wall mounting using mounting plate for K45 compact module
shock resistance	15g / 11 ms

Certificates/ approvals

General Product Approval	EMV
--------------------------	-----

[Confirmation](#)



EMV	Marine / Shipping	other
-----	-------------------	-------

[KC](#)



[Confirmation](#)

other	Environment	Industrial Communication
-------	-------------	--------------------------

[Miscellaneous](#)

[Environmental Confirmations](#)



Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RK2200-0CQ20-0AA3>

Cax online generator




<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RK2200-0CQ20-0AA3>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RK2200-0CQ20-0AA3>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RK2200-0CQ20-0AA3&lang=en

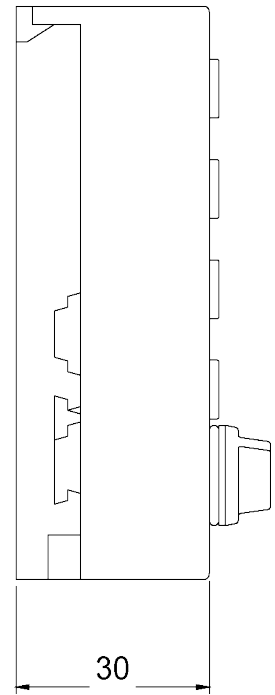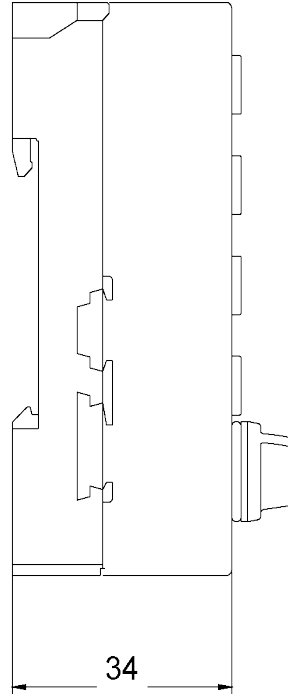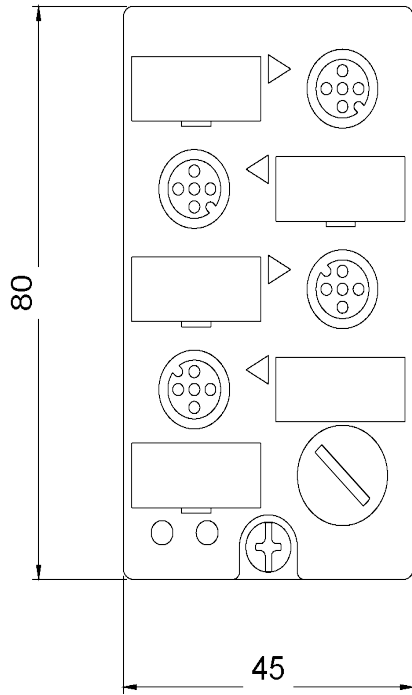

last modified:

3/11/2024